

CEE receptacles 16A and 32A, screwless connection technique

Other voltages and frequencies available on request.

Plugs for the world

Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	1340	1341	—
16	4	—	1342	1343
16	5	—	—	31
32	3	1345	1346	—
32	4	—	1347	1348
32	5	—	—	32

⚠ IP 44

Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	—	—	—
16	4	1750	1751	418
16	5	1755	1756	419
32	3	1851	420	1852
32	4	1855	1856	421
32	5	1860	1861	422

⚠ IP 44

Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	1719	1720	1721
16	4	—	1723	1724
16	5	—	1730	3331
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44

Wall mounted receptacles with TwinCONTACT



screwless spring terminals

A	P	110V	230V	400V
16	3	1867	241	1868
16	4	1870	1871	242
16	5	1875	1876	200
32	3	1877	243	1878
32	4	1879	1880	244
32	5	1884	1885	245

⚠ IP 67

Panel mounted receptacles with TwinCONTACT



screwless spring terminals, straight

A	P	110V	230V	400V
16	3	1667	1668	1669
16	4	1672	1673	1674
16	5	1678	1679	3385
32	3	1786	1787	1788
32	4	1789	1790	1791
32	5	1795	1796	1797

⚠ IP 44

Panel mounted receptacles with TwinCONTACT



screwless spring terminals, angled 20°

A	P	110V	230V	400V
16	3	1631	1632	1633
16	4	1636	1637	1638
16	5	1642	1643	3473
32	3	1733	1734	1735
32	4	1738	1739	1740
32	5	1744	1745	1746

⚠ IP 44

Panel mounted receptacles RAPIDO with TwinCONTACT



screwless spring terminals, central fixing, 61 mm Ø mounting hole

A	P	110V	230V	400V
16	3	1132	997	—
16	4	—	—	—
16	5	—	—	—
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44

Panel mounted receptacles with TwinCONTACT



screwless spring terminals, straight

A	P	110V	230V	400V
16	3	1707	1708	1709
16	4	1710	1711	1712
16	5	1716	1717	1131
32	3	1809	1810	1811
32	4	1812	1813	1814
32	5	1818	1819	1820

⚠ IP 67

Panel mounted receptacles with TwinCONTACT



screwless spring terminals, angled 20°

A	P	110V	230V	400V
16	3	1700	1701	1702
16	4	—	1703	1704
16	5	—	—	3485
32	3	1801	1802	1803
32	4	—	1804	1805
32	5	—	—	1808

⚠ IP 67

Panel mounted receptacles RAPIDO with TwinCONTACT




screwless spring terminals, central fixing, 70 mm Ø mounting hole

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	1133	998
16	5	—	—	907
32	3	1135	987	—
32	4	—	1166	988
32	5	—	—	989

⚠ IP 44

TwinCONTACT Screwless connection technique

without screws, double terminal with split spring for throughwiring.

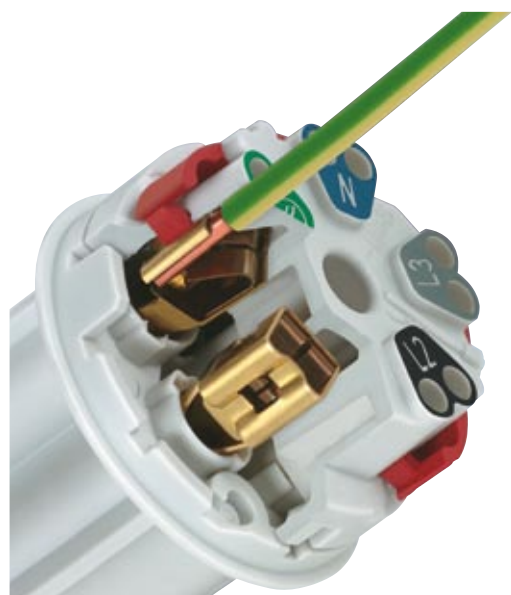

RAPIDO

RAPIDO receptacles are available with screw terminals or with screwless TwinCONTACT.

16A, 3p:

for mounting holes 61 mm diam. and wall thickness from 2 up to 5 mm.

16A, 4p + 5p and 32A:

for mounting holes 70 mm diam. and wall thickness from 2 up to 9 mm.



CEE plugs and inlets 16A up to 125A

Other voltages and frequencies available on request.

Plugs AM-TOP




single part body, screw terminals

A	P	110V	230V	400V
16	3	247	248	249
16	4	250	251	252
16	5	256	257	3
32	3	259	260	261
32	4	262	263	264
32	5	268	269	4

⚠ IP 44

Plugs StarTOP with SafeCONTACT




screwless with insulation displacement technique

A	P	110V	230V	400V
16	3	947	948	—
16	4	—	951	952
16	5	—	—	33
32	3	711	712	—
32	4	—	717	719
32	5	—	—	34

⚠ IP 44

Plugs AM-TOP




single part body, screw terminals

A	P	110V	230V	400V
16	3	277	278	279
16	4	280	281	282
16	5	286	287	288
32	3	289	290	291
32	4	292	293	294
32	5	298	299	300

⚠ IP 67

Plugs PowerTOP Xtra



with rubberized grip area, for toughest conditions

A	P	110V	230V	400V
63	3	13201	13202	13203
63	4	13204	13205	13206
63	5	13210	13211	13212
125	3	13215	13216	—
125	4	13217	13218	13219
125	5	13223	13224	13225

⚠ IP 67

Panel mounted inlets RAPIDO




with screw terminals, central fixing, 61 mm Ø mounting hole

A	P	110V	230V	400V
16	3	919	924	—
16	4	—	—	931
16	5	—	—	949
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44


Wall mounted appliance inlets



A	P	110V	230V	400V
16	3	843	844	—
16	4	—	—	800
16	5	—	—	801
32	3	—	802	—
32	4	—	—	803
32	5	—	—	804

⚠ IP 44

Panel mounted appliance inlets




with hinged lid

A	P	110V	230V	400V
16	3	—	—	—
16	4	392	393	394
16	5	398	399	400
32	3	401	402	403
32	4	404	405	406
32	5	410	411	412

⚠ IP 44

Panel mounted inlets



A	P	110V	230V	400V
16	3	810	812	—
16	4	—	837	813
16	5	—	—	815
32	3	816	817	—
32	4	—	838	819
32	5	—	—	821

⚠ IP 44

Panel mounted inlets



A	P	110V	230V	400V
16	3	825	826	—
16	4	—	839	827
16	5	—	—	829
32	3	830	831	—
32	4	—	840	832
32	5	—	—	834

⚠ IP 67

Plugs ProTOP




split body, screw terminals

A	P	110V	230V	400V
16	3	147	148	149
16	4	—	151	152
16	5	—	—	13
32	3	159	160	—
32	4	—	163	164
32	5	—	—	14

⚠ IP 44

Plugs PowerTOP Xtra



with rubberized grip area, for toughest conditions

A	P	110V	230V	400V
63	3	13101	13102	—
63	4	—	13105	13106
63	5	—	13111	13112
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

⚠ IP 44

Plugs PowerTOP




with external strain relief

A	P	110V	230V	400V
16	3	3794	3796	3799
16	4	3807	3811	3809
16	5	3819	3823	3821
32	3	3829	3830	3832
32	4	3839	3844	3841
32	5	3851	3855	3853

⚠ IP 67

Angled plugs




*VarioTOP

A	P	110V	230V	400V
16	3	1410	1411	—
16	4	—	891	315
16	5	3312	3981*	3980*
32	3	—	3306	—
32	4	—	3646	3987
32	5	—	3424	3266

⚠ IP 44

Panel mounted inlets RAPIDO




with screw terminals, central fixing, 70 mm Ø mounting hole

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	932	933
16	5	—	—	972
32	3	935	938	—
32	4	—	939	942
32	5	—	—	945

⚠ IP 44


Wall mounted appliance inlets



A	P	110V	230V	400V
16	3	331	332	333
16	4	334	335	336
16	5	340	341	342
32	3	343	344	345
32	4	346	347	348
32	5	352	353	354

⚠ IP 44


Wall mounted appliance inlets



A	P	110V	230V	400V
63	3	1216	1107	1217
63	4	355	356	357
63	5	359	360	361
125	3	—	—	—
125	4	362	363	364
125	5	366	367	368

⚠ IP 67


Panel mounted inlets



A	P	110V	230V	400V
63	3	822	1981	—
63	4	—	1984	1982
63	5	—	—	1688
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

⚠ IP 44

Panel mounted inlets



A	P	110V	230V	400V
63	3	835	836	—
63	4	—	3704	3656
63	5	—	—	3658
125	3	—	3665	—
125	4	—	3413	3583
125	5	—	—	1983

⚠ IP 67

CEE connectors 16A up to 125A

63A: SoftCONTACT, 125A: TorsionSpringCONTACT

Other voltages and frequencies available on request.



Plugs for the world

Connectors AM-TOP

single part body, screw terminals

A	P	110V	230V	400V
16	3	509	510	511
16	4	512	513	514
16	5	518	519	5
32	3	521	522	523
32	4	524	525	526
32	5	530	531	6

⚠ IP 44

Connectors ProTOP

split body, screw terminals

A	P	110V	230V	400V
16	3	179	180	181
16	4	—	193	194
16	5	—	—	15
32	3	121	122	—
32	4	—	125	126
32	5	—	—	16

⚠ IP 44

Connectors StarTOP with SafeCONTACT

screwless with insulation displacement technique

A	P	110V	230V	400V
16	3	979	980	—
16	4	—	993	994
16	5	—	—	35
32	3	725	731	—
32	4	—	761	763
32	5	—	—	36

⚠ IP 44

Connectors PowerTOP Xtra

with rubberized grip area, for toughest conditions

A	P	110V	230V	400V
63	3	14101	14102	—
63	4	—	14105	14106
63	5	—	14111	14112
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

⚠ IP 44

Connectors AM-TOP

single part body, screw terminals

A	P	110V	230V	400V
16	3	539	540	541
16	4	542	543	544
16	5	548	549	550
32	3	551	552	553
32	4	554	555	556
32	5	560	561	562

⚠ IP 67

Connectors PowerTOP

with external strain relief

A	P	110V	230V	400V
16	3	3859	3860	3862
16	4	3869	3873	3871
16	5	3879	3883	3881
32	3	3887	3888	3891
32	4	3896	3899	3897
32	5	3905	3909	3907

⚠ IP 67

Connectors PowerTOP Xtra

with rubberized grip area, for toughest conditions

A	P	110V	230V	400V
63	3	14201	14202	14203
63	4	14204	14205	14206
63	5	14210	14211	14212
125	3	14215	14216	—
125	4	14217	14218	14219
125	5	14223	14224	14225

⚠ IP 67

Angled connector

A	P	110V	230V	400V
16	3	—	1438	—
16	4	—	—	—
16	5	—	—	—
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44

PowerTOP Xtra



PowerTOP Xtra is rubberized for the best grip. Improved impact resistance even under humid conditions. Highly heat-resistant contact carrier, frame terminals, cable gland and sealing, strain relief and protection against kinking. Enclosure with thread lock, two safety slides and plugs with nickel-plated contacts. Connectors 63A with **SoftCONTACT** and 125A with **TorsionSpringCONTACT**.

SoftCONTACT




TorsionSpringCONTACT



StarTOP



with SafeCONTACT, screwless with insulation displacement technique, cable gland with sealing, strain relief and protection against kinking, 2-part enclosure with thread and locking slider.

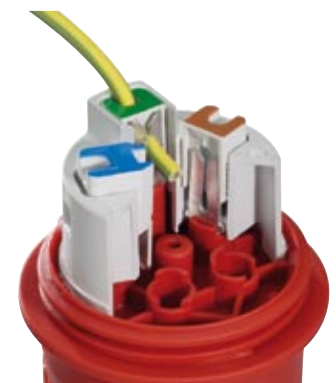

CEE receptacles switched, interlocked, 16A up to 125A

63A: SoftCONTACT, 125A: TorsionSpringCONTACT. CEE receptacles with DUO-interlock can be padlocked.

Other voltages and frequencies available on request.

Wall mounted receptacles with mechanical DUO-interlock



▲ IP 44

A	P	110V	230V	400V
16	3	7010	7002	—
16	4	5457	5099	5100
16	5	5459	5102	5103
32	3	5743	5696	—
32	4	5460	5104	5105
32	5	5462	5107	5108

Wall mounted receptacles with mechanical DUO-interlock



▲ IP 44

A	P	110V	230V	400V
63	3	6569	6571	—
63	4	—	5955	5956
63	5	—	—	5959
125	3	—	—	—
125	4	—	—	—
125	5	—	—	—

Wall mounted receptacles with mechanical DUO-interlock



▲ IP 44

A	P	110V	230V	400V
16	3	7602	7603	—
16	4	—	7604	7605
16	5	—	—	7607
32	3	7611	7612	—
32	4	—	7613	7614
32	5	—	—	7616

Panel mounted receptacles with mechanical DUO-interlock



▲ IP 44

A	P	110V	230V	400V
16	3	7502	7503	—
16	4	—	7504	7505
16	5	—	—	7507
32	3	7511	7512	—
32	4	—	7513	7514
32	5	—	—	7516

Wall mounted receptacles with mechanical DUO-interlock



▲ IP 44

fused,
DIN-rail

A	P	110V	230V	400V
16	3	—	7213	—
16	4	—	—	5610
16	5	—	—	5613
32	4	—	—	5615
32	5	—	—	5618
63	4	—	—	6059
63	5	—	—	6062

Wall mounted receptacles with mechanical DUO-interlock



▲ IP 44

fused,
MCB

A	P	110V	230V	400V
16	3	—	7216	—
16	4	—	—	7217
16	5	—	—	7218
32	4	—	—	7219
32	5	—	—	7220
63	4	—	—	7221
63	5	—	—	7222

Wall mounted receptacles with mechanical DUO-interlock



▲▲ IP 67

A	P	110V	230V	400V
16	3	7011	7012	—
16	4	—	5599	5600
16	5	—	5602	5603
32	3	5924	5793	—
32	4	—	5604	5605
32	5	—	5607	5608

Wall mounted receptacles with mechanical DUO-interlock



▲▲ IP 67

A	P	110V	230V	400V
63	3	5925	5911	—
63	4	—	5109	5110
63	5	—	5112	5113
125	3	7060	7000	—
125	4	—	5887	5691
125	5	—	5888	5692

Wall mounted receptacles with mechanical DUO-interlock



▲▲ IP 67

A	P	110V	230V	400V
16	3	7620	7621	—
16	4	—	7623	7624
16	5	—	—	7626
32	3	7628	7629	—
32	4	—	7633	7634
32	5	—	—	7636

Panel mounted receptacles with mechanical DUO-interlock



▲▲ IP 67

A	P	110V	230V	400V
16	3	7520	7521	—
16	4	—	7523	7524
16	5	—	—	7526
32	3	7530	7531	—
32	4	—	7533	7534
32	5	—	—	7536

Wall mounted receptacles with mechanical DUO-interlock



▲▲ IP 67

fused,
DIN-rail

A	P	110V	230V	400V
16	3	—	7050	—
16	4	—	—	5630
16	5	—	—	5633
32	4	—	—	5635
32	5	—	—	5638
63	4	—	—	5640
63	5	—	—	5643

Wall mounted receptacles with mechanical DUO-interlock



▲▲ IP 67

fused,
MCB

A	P	110V	230V	400V
16	3	—	7238	—
16	4	—	—	7239
16	5	—	—	7240
32	4	—	—	7241
32	5	—	—	7242
63	4	—	—	7243
63	5	—	—	7244

Mechanical DUO-interlock



After insertion and switching on, the plug is interlocked in the ON-position.
After switching off and withdrawing, the switch is locked in the OFF-position.



Phase inverter plugs/inlets 16A and 32A Plugs and receptacles for low voltage

Other voltages and frequencies available on request.

Phase inverter plugs AM-TOP



single part
body, screw
terminals

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	338	339
16	5	—	318	319
32	3	—	—	—
32	4	—	396	397
32	5	—	321	322

⚠ IP 44

Phase inverter plugs ProTOP



split body,
screw
terminals

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	—	—
16	5	—	—	3319
32	3	—	—	—
32	4	—	—	—
32	5	—	—	3322

⚠ IP 44

Wall mounted phase inverter inlets



A	P	110V	230V	400V
16	3	—	—	—
16	4	—	—	—
16	5	—	—	3517
32	3	—	—	—
32	4	—	—	—
32	5	—	—	3523

⚠ IP 44

Panel mounted phase inverter inlets



A	P	110V	230V	400V
16	3	—	—	—
16	4	—	3348	3350
16	5	—	—	20970
32	3	—	—	—
32	4	—	3355	3356
32	5	—	3717	21241

⚠ IP 44

Panel mounted phase inverter inlet



A	P	110V	230V	400V
16	3	—	—	—
16	4	—	—	—
16	5	—	—	854
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

⚠ IP 44

Wall mounted receptacles for low voltage



A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	1825	1831	—
16	3	1832	1837	1835
32	2	1838	1844	—
32	3	1845	1850	1848

⚠ IP 44

Panel mounted receptacles for low voltage



A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	603	604	—
16	3	610	611	612
32	2	616	617	—
32	3	623	624	625

⚠ IP 44

Plugs for low voltage



A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	629	630	—
16	3	636	637	638
32	2	642	643	—
32	3	649	650	651

⚠ IP 44

Connectors for low voltage



A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	681	682	—
16	3	688	689	690
32	2	694	695	—
32	3	701	702	703

⚠ IP 44

Phase inverter plugs AM-TOP



single part
body, screw
terminals

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	3338	3339
16	5	—	—	325
32	3	—	—	—
32	4	—	3340	3341
32	5	—	327	328

⚠ IP 67

Phase inverter plug VarioTOP



⚠ IP 44

A	P	110V	230V	400V
16	3	—	—	—
16	4	—	—	—
16	5	—	—	859
32	3	—	—	—
32	4	—	—	—
32	5	—	—	—

Wall mounted phase inverter inlets



A	P	110V	230V	400V
16	3	—	—	—
16	4	—	3342	3343
16	5	—	—	2511
32	3	—	—	—
32	4	—	3345	3346
32	5	—	3347	2478

⚠ IP 44



Wall mounted receptacles for low voltage



A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	577	578	—
16	3	584	585	586
32	2	590	591	—
32	3	597	598	599

⚠ IP 44

Panel mounted receptacles for low voltage



A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	1270	2855	—
16	3	2845	1272	2860
32	2	1271	2864	—
32	3	2870	1273	2852


⚠ IP 44

Wall mounted appliance inlets for low voltage




A	P	20-25V 50 a. 60 Hz	40-50V 50 a. 60 Hz	20-25V/ 40-50V 100-200 Hz
16	2	1955	1961	—
16	3	1962	1967	1965
32	2	1968	1974	—
32	3	1975	1980	1978

⚠ IP 44




Plugs and receptacles 7 pole


Other voltages and frequencies available on request.

Wall mounted receptacles		A	P	230V	400V	500V
	16	7	733	734	1035	
	32	7	735	736	1040	


▲ IP 44

Panel mounted receptacles angled 20°		A	P	230V	400V	500V
	16	7	737	738	1045	
	32	7	739	740	1050	


▲ IP 44

Plugs AM-TOP		A	P	230V	400V	500V
	16	7	741	742	1055	
	32	7	743	744	1060	


▲ IP 44

Wall mounted inlets		A	P	230V	400V	500V
	16	7	—	2166	—	
	32	7	—	2167	—	


▲ IP 44

Connectors AM-TOP		A	P	230V	400V	500V
	16	7	745	746	1065	
	32	7	747	748	1070	


▲ IP 44

Wall mounted receptacles with mechanical DUO-interlock		A	P	230V	400V	500V
	16	7	—	5536	—	
	32	7	—	7061	—	


▲ IP 44

Wall mounted receptacles		A	P	230V	400V	500V
	16	7	3240	2746	3262	
	32	7	2818	2648	2782	


▲▲ IP 67

Panel mounted receptacles angled 20°		A	P	230V	400V	500V
	16	7	2883	2459	2296	
	32	7	—	2317	2212	


▲▲ IP 67

Plugs AM-TOP		A	P	230V	400V	500V
	16	7	3776	3777	3913	
	32	7	2405	2324	2213	


▲▲ IP 67

Panel mounted inlets		A	P	230V	400V	500V
	16	7	749	750	1075	
	32	7	751	752	1080	

▲ IP 44

Connectors AM-TOP		A	P	230V	400V	500V
	16	7	3783	3916	3784	
	32	7	2406	2255	2460	

▲▲ IP 67

Wall mounted receptacles with mechanical DUO-interlock		A	P	230V	400V	500V
	16	7	—	5785	—	
	32	7	—	6106	—	

▲▲ IP 67

Plugs and receptacles 7 pole for multi functional applications

These plugs and receptacles provide solutions where there are multi functional requirements in industry, farming and commerce.

This number of poles provides solutions in the following fields:

- Star-delta start-up
- Closed loop control
- Open loop control
- Monitoring
- Detection and alarms
- Clearing alarms
- Electrical interlocking

