



Self-Contained Emergency KELUAR Sign

PEX-215LED (Super Bright LEDs)

PEX-215LED





Specifications

- Model ➔ PEX-215 LED.
- Light Source ➔ 18 nos super bright LED (SMD).
- LED Wattage ➔ ~0.80W.
- Mode ➔ Maintained.
- Weight ➔ ~1.2 Kg.
- Battery ➔ 2 x 1.2V 1.7AH Ni-Cd.
- Housing ➔ Electro-galvanised sheet steel with powder coated paint.
- Charger ➔ Constant current.
- Mounting ➔ Surface mounting direct to wall or ceiling.
- Dimension ➔ 556mm (L) x 52mm (W) x 155mm (H).
- Monitoring ➔ Red LED indicating healthy supply and charging.
- Compliance ➔ MS 983 : 2004, MS 619-2-22:2005.
MS IEC 60598-1 : 2012.
Jabatan Bomba Dan Penyelamat Malaysia certified.
- Input Voltage ➔ 240 V +/- 10% 50Hz.
- Recharge Period ➔ 16 - 24 hours.
- Back Up Duration ➔ 3 hours.
- Battery Protection ➔ Low voltage cut-off to prevent over discharging.
- Input Power ➔ 4.5W.
- Ingress Of Protection ➔ IP-20.
- Ambient Temperature ➔ 40 °C.





PEX 215 LED EMERGENCY 'KELUAR' SIGN

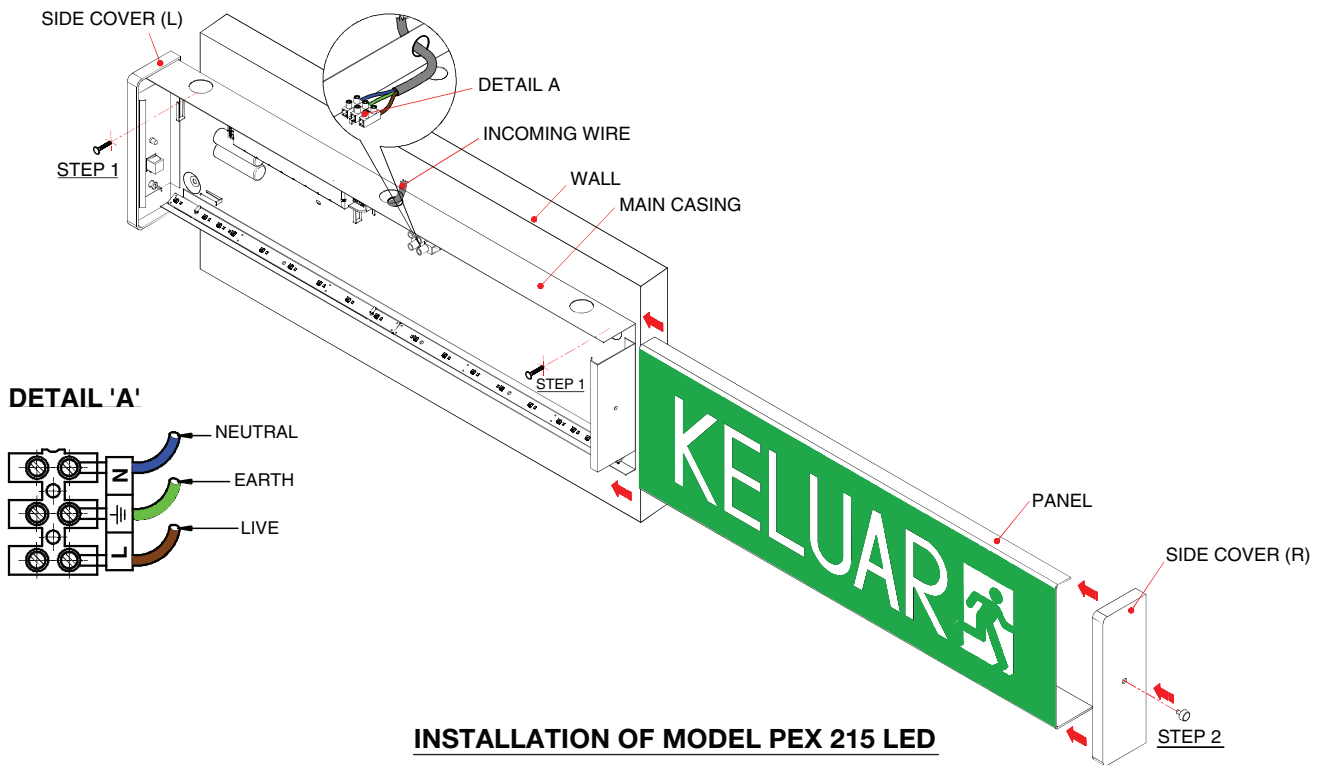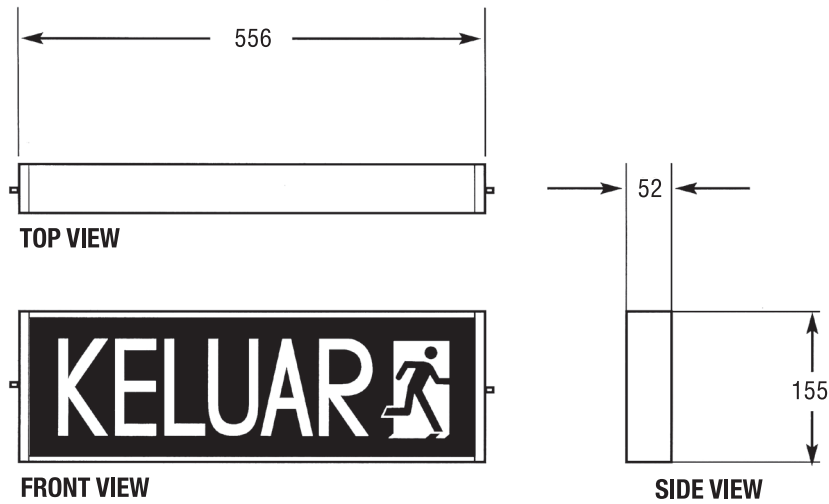

Ordering Guide

Model	PEX-215LED	Legend
Normal (Standard)	PEX-215LED	
Single-side Arrow To Right	PEX-215LED / RA	
Single-side Arrow To Left	PEX-215LED / LA	
Single-side Arrow Straight Ahead	PEX-215LED / SA	
Double-side with Arrow	PEX-215 DLED	